


# コンベヤチェーン用sproケット

A形  
(材質：普通鋼)

BW形  
(材質：普通鋼)

CW形  
(材質：普通鋼)

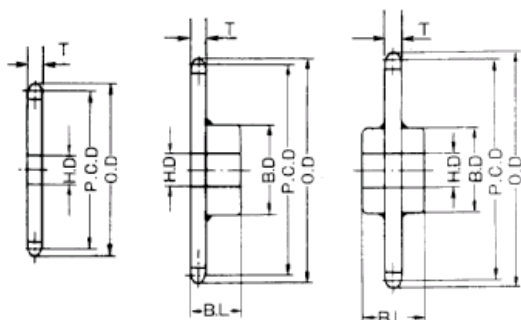

3075-S.R.F												
歯数	ローラ形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	軸穴径(D)		B形		C形		概略重量kg	
					最小	最大	径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形
6	S	12	158	150.00	20	40	68	50	73	55	2.9	3.2
	R	12	170								2.7	3.0
	F	9	170								2.4	2.7
7	S	12	194	172.86	20	45	73	55	83	60	3.8	4.4
	R	12	196								3.5	4.1
	F	9	196								3.1	3.7
8	S	12	206	195.92	20	45	73	55	83	60	4.4	5.0
	R	12	210								4.1	4.7
	F	9	210								3.5	4.2
9	S	12	230	219.30	20	55	83	60	93	70	5.8	6.8
	R	12	240								5.4	6.5
	F	9	240								4.7	5.8
10	S	12	252	242.27	20	55	83	60	93	70	6.6	7.6
	R	12	260								6.2	7.2
	F	9	260								5.3	6.4
11	S	12	276	266.24	20	55	83	60	93	70	7.5	8.5
	R	12	286								7.1	8.1
	F	9	286								6.0	7.0
12	S	12	300	289.80	20	55	83	60	93	70	8.5	9.6
	R	12	308								8.1	9.1
	F	9	308								6.7	7.8

5100-S.R.F												
歯数	ローラ形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	軸穴径(D)		B形		C形		概略重量kg	
					最小	最大	径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形
6	S	16	216	200.00	25	60	93	70	98	80	7.1	8.0
	R	16	224								6.8	7.7
	F	12	224								6.0	6.9
7	S	16	246	230.48	25	65	98	80	108	90	9.3	10.8
	R	16	254								8.9	10.5
	F	12	254								7.9	9.5
8	S	16	278	261.23	25	65	98	80	108	90	10.8	12.4
	R	16	286								10.4	11.9
	F	12	286								9.0	10.6
9	S	16	308	292.40	25	65	98	80	108	90	12.6	14.1
	R	16	316								12.1	13.6
	F	12	316								10.3	11.8
10	S	16	337	323.62	25	70	108	90	117	100	16.1	17.8
	R	16	348								15.5	17.3
	F	12	348								13.3	15.1
11	S	16	372	354.99	25	70	108	90	117	100	18.2	19.9
	R	16	378								17.6	19.4
	F	12	378								14.8	16.7
12	S	16	400	386.40	25	70	108	90	117	100	20.5	22.2
	R	16	410								19.9	21.6
	F	12	410								16.5	18.3

3100-S.R.F												
歯数	ローラ形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	軸穴径(D)		B形		C形		概略重量kg	
					最小	最大	径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形
6	S	12	210	200.00	20	45	73	55	83	60	4.6	5.2
	R	12	220								4.5	5.1
	F	9	220								3.8	4.5
7	S	12	240	230.48	20	45	73	55	83	60	5.5	6.2
	R	12	250								5.4	6.0
	F	9	250								4.5	5.2
8	S	12	269	261.23	20	45	73	55	83	60	6.7	7.3
	R	12	272								6.5	7.2
	F	9	272								5.3	6.0
9	S	12	300	292.40	20	55	83	60	93	70	8.6	9.7
	R	12	310								8.4	9.5
	F	9	310								7.0	8.1
10	S	12	333	323.62	20	55	83	60	93	70	10.1	11.5
	R	12	336								9.9	11.0
	F	9	336								8.1	9.2
11	S	12	364	354.99	20	55	83	60	93	70	11.7	12.7
	R	12	374								11.5	12.5
	F	9	374								9.3	10.3
12	S	12	396	386.40	20	55	83	60	93	70	13.4	14.5
	R	12	401								13.2	14.2
	F	9	401								10.5	11.6

5150S.R.F												
歯数	ローラ形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	軸穴径(D)		B形		C形		概略重量kg	
					最小	最大	径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形
6	S	16	310	300.00	25	60	93	70	108	90	11.20	14.60
	R	16	324								11.70	14.10
	F	11	324								9.20	11.80
7	S	16	362	345.72	25	70	108	90	117	100	17.60	19.50
	R	16	370								17.00	19.90
	F	11	370								13.70	15.60
8	S	16	408	391.85	25	70	108	90	117	100	21.00	22.80
	R	16	416								20.50	22.10
	F	11	416								16.00	17.90
9	S	16	456	438.60	25	70	108	90	117	100	25.00	26.80
	R	16	462								24.10	25.90
	F	11	462								18.60	20.50
10	S	16	502	485.44	30	75	117	100	127	110	31.00	33.20
	R	16	510								30.10	32.50
	F	11	510								23.40	25.70
11	S	16	550	532.48	30	75	117	100	127	110	36.00	38.00
	R	16	556								35.00	37.00
	F	11	556								26.60	29.00
12	S	16	596	579.60	30	85	127	110	137	120	43.50	46.00
	R	16	603								42.50	45.00
	F	11	603								32.50	35.50

# コンベヤチェーン用sprocket

7100-S.R.F												
歯数	ローラー形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	軸穴径(D)		B形		C形		概略重量kg	
					最小	最大	径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形
6	S	20	220	200.00	25	65	98	80	108	90	9.00	10.50
	R	20	236								8.40	9.90
	F	12	236								7.00	8.60
7	S	20	250	230.48	25	70	108	90	117	100	12.20	13.90
	R	20	266								11.50	13.20
	F	12	266								9.50	11.30
8	S	20	280	261.23	25	70	108	90	117	100	14.10	15.90
	R	20	298								13.40	15.10
	F	12	298								10.60	12.40
9	S	20	312	292.40	30	75	117	100	127	110	18.00	20.20
	R	20	328								17.20	19.40
	F	12	328								13.70	16.00
10	S	20	323	323.62	30	75	117	100	127	110	20.60	22.80
	R	20	360								19.60	21.80
	F	12	360								15.10	17.50
11	S	20	374	354.99	30	85	127	110	137	120	25.40	28.10
	R	20	390								24.50	27.00
	F	12	390								19.00	21.80
12	S	20	406	386.40	30	85	127	110	137	120	28.30	31.00
	R	20	422								27.20	30.00
	F	12	422								20.70	23.50

10108-S.R.F (450-S.R.F)												
歯数	ローラー形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	軸穴径(D)		B形		C形		概略重量kg	
					最小	最大	径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形
6	S	19	220	203.20	25	55	87	70	98	80	7.50	8.80
	R	19	238								7.20	8.40
	F	16	238								6.50	7.80
7	S	19	252	234.21	25	60	93	70	108	90	9.50	11.90
	R	19	300								9.10	11.50
	F	16	300								8.20	10.70
8	S	19	282	265.41	25	60	93	70	108	90	11.40	13.80
	R	19	300								10.90	13.20
	F	16	300								9.70	12.20
9	S	19	314	297.08	25	70	108	90	117	100	15.90	17.60
	R	19	332								15.50	17.10
	F	16	332								14.00	15.70
10	S	19	346	328.80	25	70	108	90	117	100	18.30	20.00
	R	19	362								17.70	19.40
	F	16	362								15.90	17.70
11	S	19	378	360.67	25	70	108	90	117	100	21.00	22.70
	R	19	394								21.10	22.00
	F	16	394								18.10	19.80
12	S	19	410	392.58	25	70	108	90	117	100	24.00	25.50
	R	19	426								23.00	24.90
	F	16	426								20.50	20.20

10100-S.R.F												
歯数	ローラー形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	軸穴径(D)		B形		C形		概略重量kg	
					最小	最大	径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形
6	S	22	224	200.00	25	70	108	90	117	100	10.90	12.60
	R	22	240								10.30	12.00
	F	16	240								9.20	11.00
7	S	22	254	230.48	25	70	108	90	117	100	12.70	14.40
	R	22	270								12.00	13.70
	F	16	270								10.50	12.30
8	S	22	285	261.23	25	70	108	90	117	100	14.90	16.60
	R	22	300								14.00	15.70
	F	16	300								12.00	13.80
9	S	22	316	292.40	30	75	117	100	127	110	19.00	21.20
	R	22	332								18.00	20.20
	F	16	332								15.40	18.70
10	S	22	347	323.62	30	75	117	100	127	110	21.80	24.90
	R	22	363								20.70	22.90
	F	16	363								17.40	20.60
11	S	22	378	354.99	30	85	127	110	137	120	26.90	29.50
	R	22	394								25.70	28.30
	F	16	394								22.70	24.40
12	S	22	410	386.40	30	85	127	110	137	120	30.00	32.70
	R	22	426								28.80	31.40
	F	16	426								25.00	26.70

15208-S.R.F (650-S.R.F)												
歯数	ローラー形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	軸穴径(D)		B形		C形		概略重量kg	
					最小	最大	径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形
6	S	22	324	304.80	25	70	108	90	117	100	18.40	20.10
	R	22	344								17.40	19.10
	F	16	344								14.40	16.20
7	S	22	370	351.31	25	70	108	90	117	100	22.60	24.30
	R	22	390								21.50	23.10
	F	16	390								17.40	19.20
8	S	22	418	398.12	25	70	108	90	117	100	27.50	29.20
	R	22	438								26.20	27.90
	F	16	438								21.00	22.60
9	S	22	465	445.61	25	70	108	90	117	100	33.10	34.80
	R	22	484								31.70	33.40
	F	16	484								24.80	26.60
10	S	22	513	493.20	30	75	117	100	127	110	41.00	43.10
	R	22	532								39.30	41.50
	F	16	532								31.00	33.20
11	S	22	560	541.00	30	85	127	110	137	120	50.00	52.60
	R	22	580								48.20	50.80
	F	16	580								38.00	41.00
12	S	22	608	588.87	30	85	127	110	137	120	57.50	60.00
	R	22	628								55.50	58.10
	F	16	628								43.50	46.00

10105-S.R (430-S.R)												
歯数	ローラー形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	軸穴径(D)		B形		C形		概略重量kg	
					最小	最大	径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形
6	S	16	215	203.20	25	55	83	60	93	70	6.20	7.20
	R	16	232								5.90	6.90
7	S	16	250	234.21	25	55	87	70	98	80	8.20	9.50
	R	16	264								7.90	9.10
8	S	16	280	265.41	25	55	87	70	98	80	19.80	11.10
	R	16	294								9.40	10.70
9	S	16	312	297.08	25	55	87	70	98	80	11.60	12.90
	R	16	326								11.20	12.40
10	S	16	344	328.80	25	65	98	80	108	90	14.90	16.40
	R	16	358								14.40	15.90
11	S	16	376	360.67	25	65	98	80	108	90	17.10	18.60
	R	16	390								16.50	18.10
12	S	16	408	392.58	25	65	98	80	108	90	19.50	21.10
	R	16	422								18.90	20.40

15215-S.R.F (6205-S.R.F)												
歯数	ローラー形状	歯巾 (T)	外径 (O.D)	ピッチ径 (P.C.D)	下穴 φ	BW形		CW形		概略重量kg		
						径 B.D	長さ B.L	径 B.D	長さ B.L	B形	C形	
6	S	28	325	304.80	25	137	115	147	125	27	29	
7.5			396	374.70	25	147	125	147	125	35	35	
8			419	398.20	25	147	125	147	125	41	41	
10			514	493.20	25	157	135	157	135	59	58	
12			610	588.80	25	177	150	177	150	86	85	
12.5			634	612.80	25	177	150	177	150	88	87	
6			R	28	330	304.80	25	137	115	147	125	25
8	432	398.20			25	147	125	147	125	39	39	
10	528	493.20			25	157	135	157	135	56	55	
12	623	588.80			25	177	150	177	150	81	80	
6	F	19	330	304.80	25	137	115	147	125	21	24	
8			432	398.20	25	147	125	147	125	32	31	
10			528	493.20	25	155	135	157	135	45	44	
12			623	588.80	25	177	150	177	150	64	63	